




### Specifications

Electrical Characteristics	
Center Frequency (Fo)	70 MHz
Pass Band Bandwidth	12 MHz (64 to 76 MHz)
Pass Band Insertion Loss	3 dB @ 70 MHz
Pass Band Return Loss	≥ 17 dB
Pass Band Group Delay Variation	≤ 70 ns
Stop Band rejection	≥ 35 dB @ DC - 50 MHz ≥ 35 dB @ 90 MHz
Input / Output Impedance	50 Ohms
Power Handling	1 Watts
Input / Output Connectors	SMA-Female
Temperature Range	0 - 50 °C
Dimensions	70 x 35 x 25mm. approx.

### Test Results

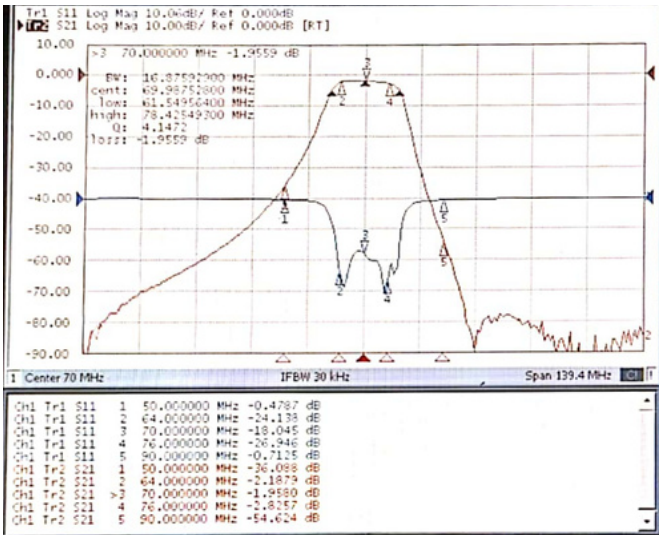

### Mechanical Drawing

