


Specifications

Electrical Characteristics	
Pass Band Frequency	4200 - 4400 MHz
Pass Band Flatness	< 0.5dB
Insertion Loss at Center Frequency (Fo)	1 dB max.
Input / Output ports Return loss	≥ 13 dB
Stop Band Rejection	≥ 55 dB @ 10 MHz to 3800MHz ≥ 60 dB @ 4000 MHz ≥ 60 dB @ 4600 MHz to 7000MHz ≥ 55 dB @ 4600 MHz
Input / Output ports Impedance	50 Ohms
Power Handling	1 Watts min.
Input / Output Connectors	SMA-Female
Temperature Range	-20 to + 76 ° C
Dimensions (L X W X H)	124.4 x 48 x 31 mm max.

Test Results

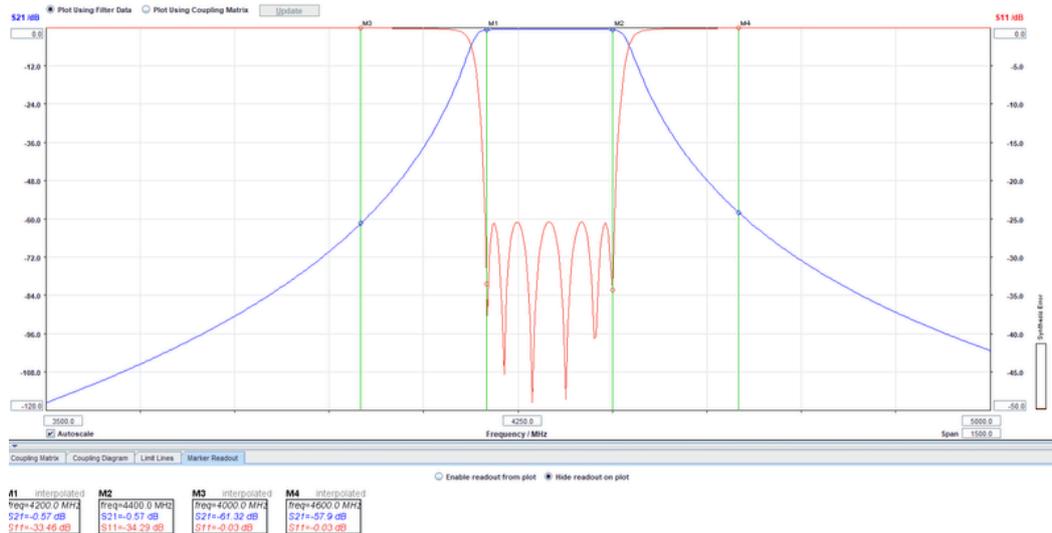

Mechanical Drawing

