


Specifications

| Electrical Characteristics | |
|---------------------------------|---|
| Center Frequency (Fo) | 70 MHz |
| Pass Band Bandwidth | 12 MHz (64 to 76 MHz) |
| Pass Band Insertion Loss | 3 dB @ 70 MHz |
| Pass Band Return Loss | ≥ 17 dB |
| Pass Band Group Delay Variation | ≤ 70 ns |
| Stop Band rejection | ≥ 35 dB @ DC - 50 MHz ≥ 35 dB @ 90 MHz |
| Input / Output Impedance | 50 Ohms |
| Power Handling | 1 Watts |
| Input / Output Connectors | SMA-Female |
| Temperature Range | 0 - 50 °C |
| Dimensions | 70 x 35 x 25mm. approx. |

Test Results

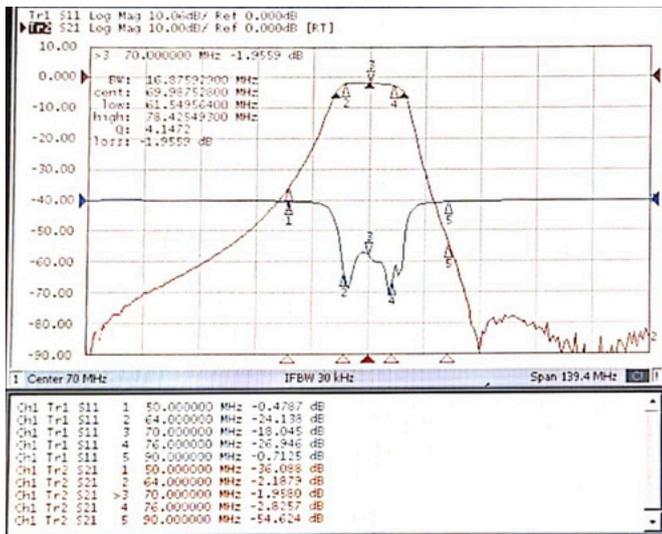

Mechanical Drawing

