


### Specifications

Electrical Characteristics	
Frequency Range	500-8000MHz
Coupling	10±1dB
Coupling Flatness	±1.2dB max
Insertion Loss	≤ 1.3dB
Directivity	>18dB
Return Loss	>16dB
Power	1W
Connector	SMA Female, 50Ω

### Drawings

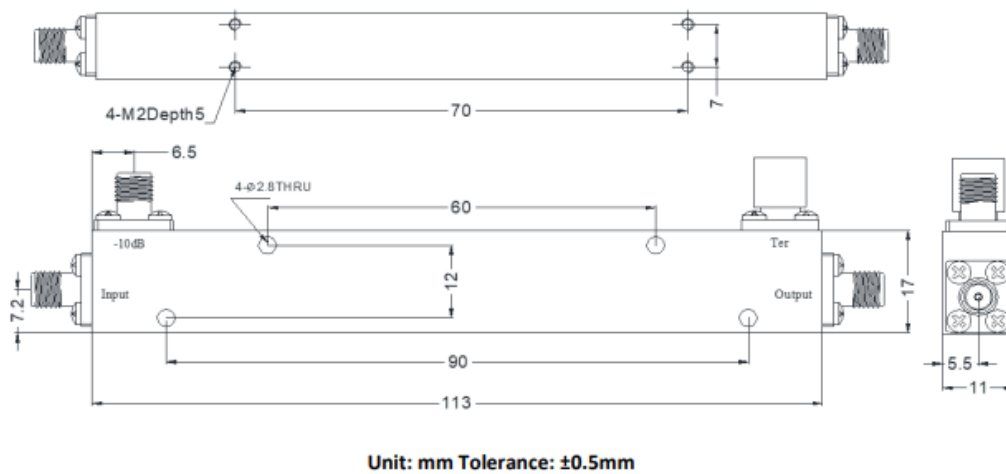

Customization can be made based on the application requirement of the customer.

### Applications



Aerospace



Defence



Satcom



Broad Casting

