


### Specifications

Electrical Characteristics	
Frequency Range	7900-8400MHz
Coupling	30±1.0dB
Type	In-Line Directional Test Coupler
Insertion Loss	0.5 dB max
Directivity	>14dB
Input / Output VSWR	1.4:1
Power	1W (CW) min
Connector	SMA Female, 50Ω
Enclosure	IP65 (Weather Sealed)

### Drawings

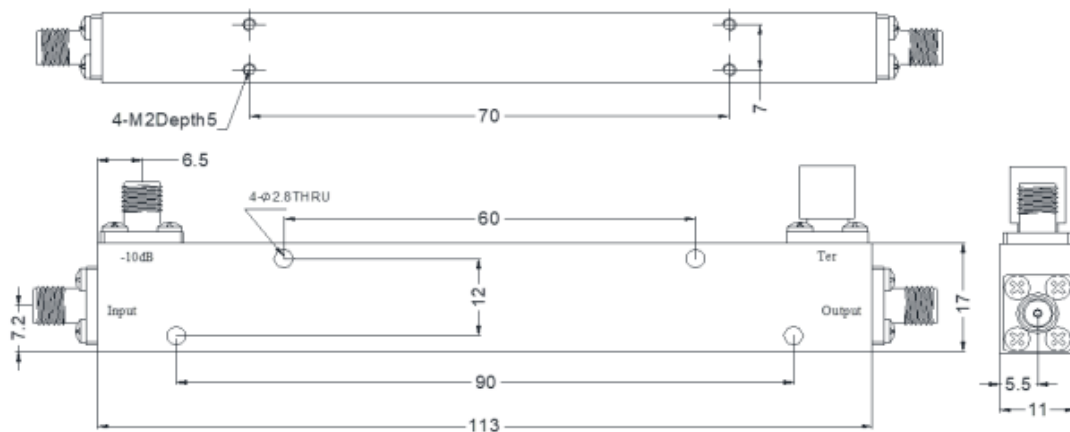

Unit: mm Tolerance: ±0.5mm

Customization can be made based on the application requirement of the customer.

### Applications



Aerospace



Defence



Satcom



Broad Casting

