


Features

- Available for S-Band Frequency
- Low Power Consumption
- An Internal Limiter
- Low Noise Figure
- Wide gain control range
- Excellent gain flatness
- Customization can be made based on the application requirement of the customer.







Technical Specifications	
Frequency Range	2.2 - 2.3 GHz
Gain	20dB min.
Gain Flatness over operating frequency	+/- 0.5 dB
Input VSWR	1.5:1
Input Impedance	50 ohms
Noise Figure	< 1 dB
Output power @1dB gain compression	+ 17dBm max.
Output VSWR	1.5:1
Output Impedance	50 ohms
RF Connectors I/p & O/p	SMA (Female)
Bias Connectors	Feedthrough
Current	75 mA
Power Supply	+15 VDC
Operating Temperature	0 to +55 °C
Dimensions	51x33x18 mm approx.

Physical Dimensions (in mm)

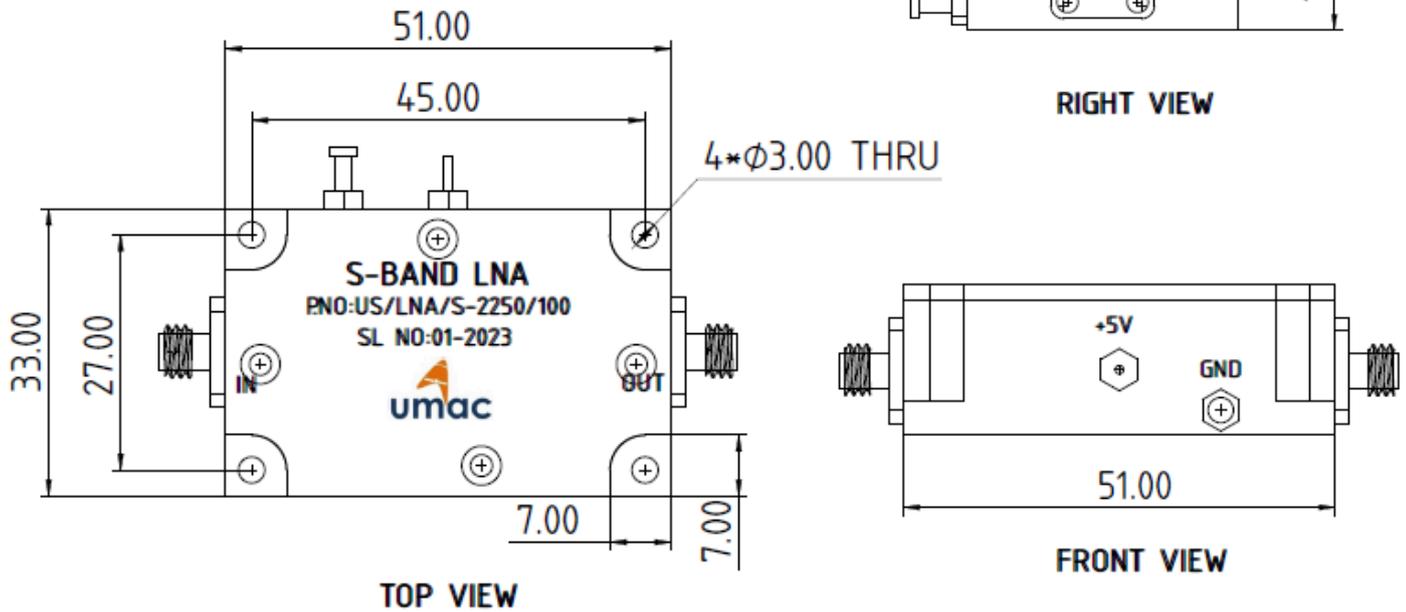

Test Results

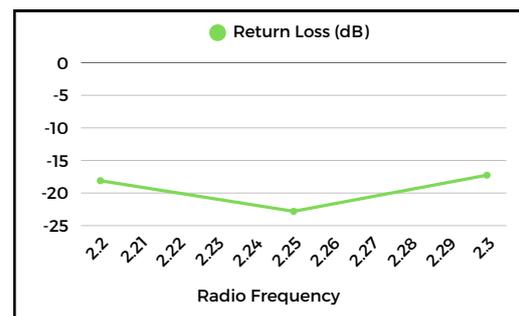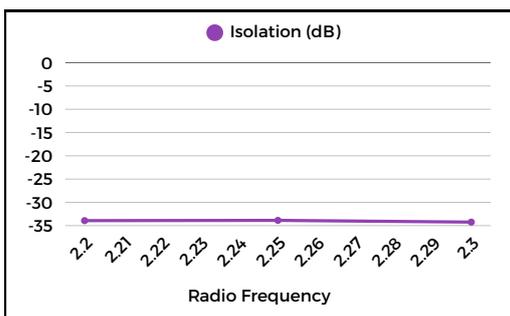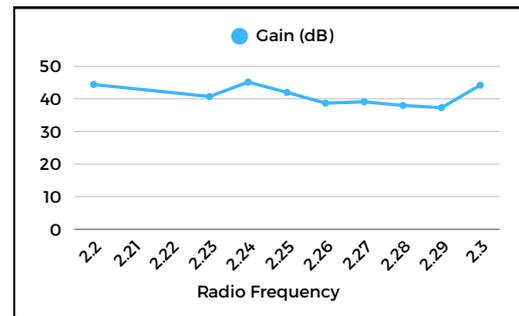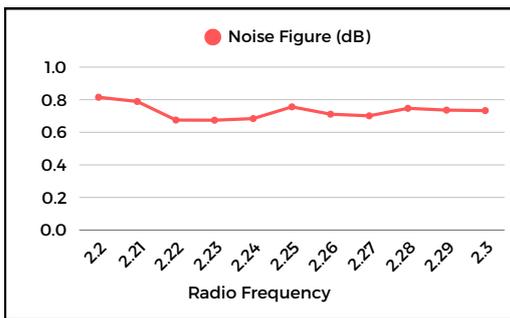

Applications



Aerospace



Defence



Satcom



Broad Casting

